

DISCFLEX



SELECTION PROCEDURE

- Check the service factor appropriate to its application in the table below.
- Calculate the power to be transmitted by using the service factor, as shown below:
- Choose a Vulkan Discflex coupling with transmissible power superior or equal to the calculated one.
- Check if the maximum holes of the coupling comply with the diameters of the machines' axles.
- Check if the DBSE (basic distance between the axles' faces) is appropriate to your project.

Power to be transmitted per 1000 rpm

$$= \frac{N \times FS \times 1000}{n} \left[\frac{\text{kw}}{1000 \text{ rpm}} \right]$$

N = Power transmitted in [Kw]

n = Rotation of coupling in [rpm]

FS = Service Factor

- Check the coupling's maximum rotation and if the balancing is necessary.

SERVICE FACTOR

Application	Service Factor Suggested
Shakers	1.3
Alternative Pumps	2
Spinning Pumps	1.2
Fuse Pumps, Lobules	1,5
Calenders and Pressing Roller	2
Drying Cylinders	1.75
Alternative Compressors	2
Spinning Compressors	1.2
Screw Compressors	1,5
Generators	1.5
Recoilers	2
Spinning Blowers	1.2
Lobule Blowers	1,5
Light Carriers	1,5
Heavy Carriers	1,75
Spinning Fans	1.5
Fans for Cooling Towers	1,5


Note:

The service factor values mentioned above represent only a generic orientation.


These values apply to electric engines and steam turbines. For diesel, Gas or Gasoline combustion engines up to 4 cylinders, add 2.0 to the service factor.

DESCRIPTION OF COMPONENTS

Items	Name
1	Cube
2	Flange
3	Membrane
4	Straightened screw
5	Torque Limiting Ring
6	Guide Bushing
7	Tubular Spacer
8	Threaded Guide Bushing
9	Allen Screw

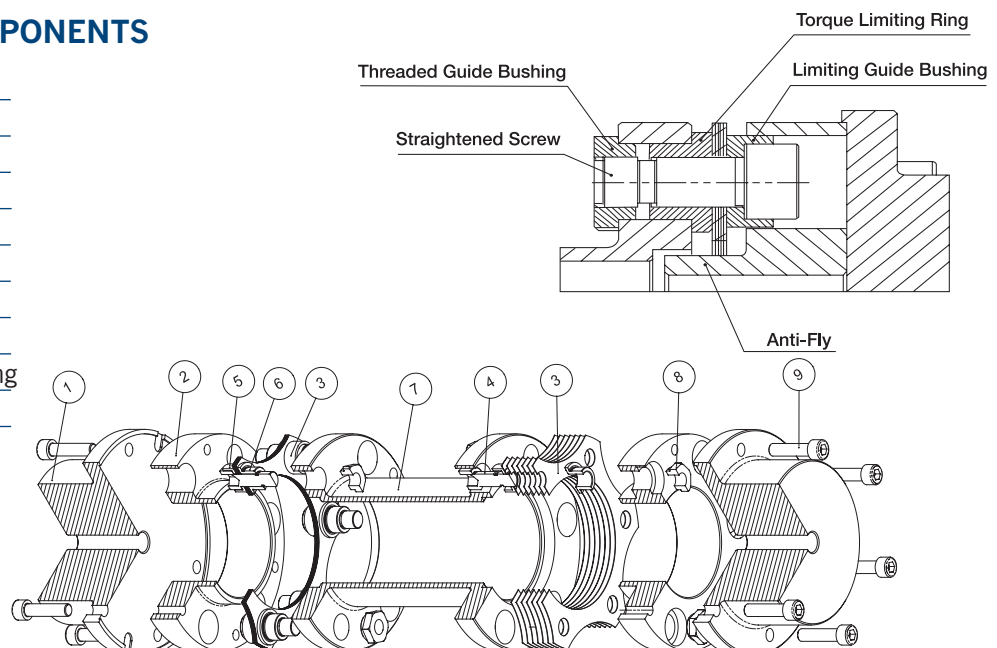

Design


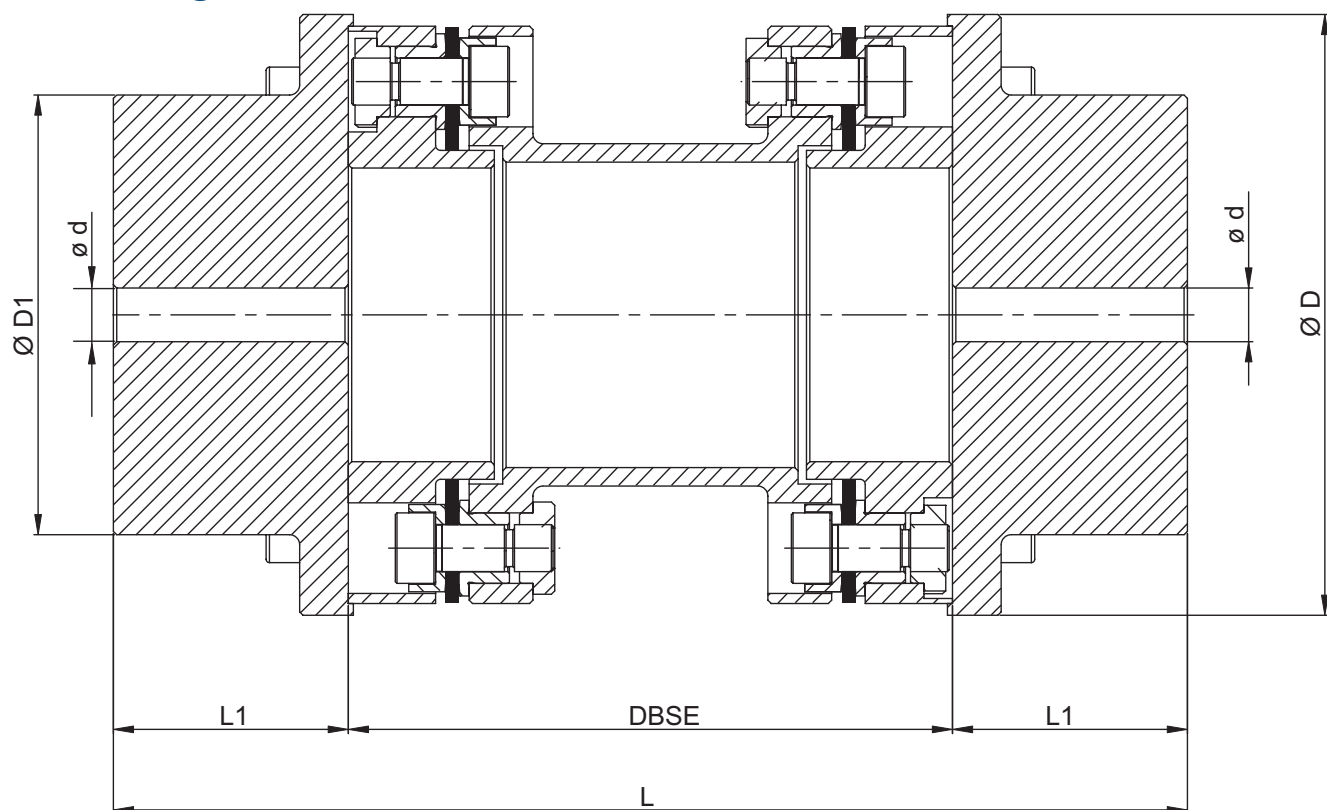


Technical Data

Size	Power $\frac{kw}{1000 rpm}$	Max. Rotation	Nominal Moment (Nm)	Max. Moment (Nm)	Residual moment with $\Delta K_w=0.5$ (Nm)	Inertia moment for $S=180$ (kg.m ²)	Power with max. Axial misalignment (N)	ΔK_a max. Axial misalignment with $K_w=0.5^\circ$ ($\pm mm$)	Weight for DBSE=180 (kg)	No. of screws
13	13	25500	124	310	4.1	0.002	210	1	3.5	6
33	33	20000	315	790	6.1	0.006	280	1.25	6.5	6
75	75	16500	716	1790	8.8	0.022	360	1.5	12	6
135	135	14400	1289	3220	11.8	0.052	560	2	20	6
230	230	12000	2197	5490	14.7	0.109	740	2.5	30	6
350	350	10500	3343	8360	34.3	0.218	780	2.75	40	6
500	500	9500	4775	11940	40.7	0.355	1080	3.25	62.5	6
740	740	8000	7066	17670	47.6	0.597	1270	3.75	85	6
930	930	7000	8881	22200	53.9	0.934	1470	4.25	110	6
1400	1400	6000	13369	33400	61.3	1.537	2700	5	158	6

Dimensional Data

Size	d (mm)		D (mm)	D1 (mm)	L1 (mm)	DBSE mín. (mm)	L (mm)				
	mín.	máx.					DBSE=100	DBSE=140	DBSE=180	DBSE=250	DBSE=460
13	10	36	83	53	41	90	180	220	260	330	540
33	20	46	105	69	46	100	190	230	270	340	550
75	20	65	130	88	56.5	120	-	251	291	361	571
135	25	80	152	112	63	140	-	264	304	374	584
230	30	90	179	131	71.5	160	-	-	320	390	600
350	30	115	205	163	90.5	170	-	-	358	428	638
500	40	127	222	181	95	170	-	-	370	440	650
740	40	140	253	206	107	180	-	-	394	464	674
930	45	155	272	223	115	180	-	-	410	480	690
1400	50	172	297	248	130	180	-	-	440	510	720

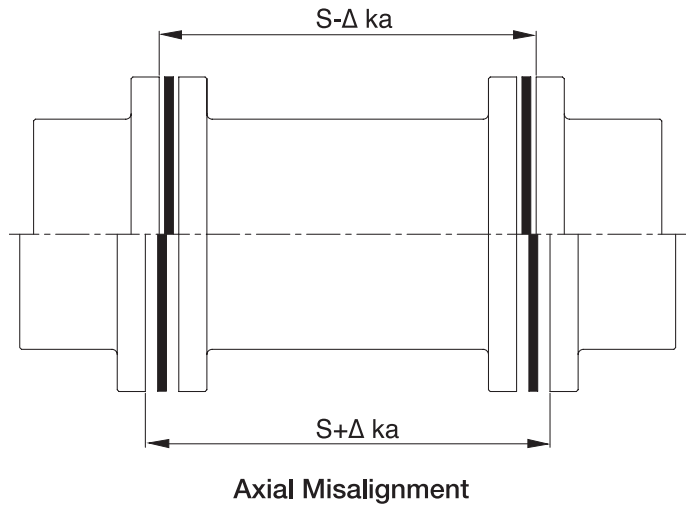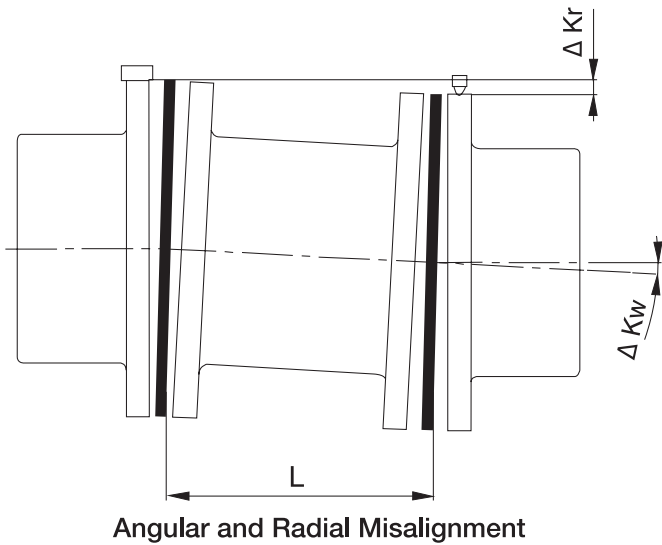


$$\Delta K_w = \arctan \left(\frac{\Delta K_r}{L} \right)$$

Admissible Misalignment Data

Misalignments	Sizes									
	13	33	75	135	230	350	500	740	930	1000
Axial $\pm \Delta k_a$ (mm)	1	1.25	1.5	2	2.5	2.75	3.25	3.75	4.25	5
Radial Δk_r (mm)	0.4	0.45	0.54	0.63	0.72	0.77	0.77	0.82	0.82	0.82
Angular Δk_w (°)	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5

BALANCING

In compliance with the API 671 Norm, 8th edition.
Balanced according to AGMA Norm Standard 9000 - C90 class 9.

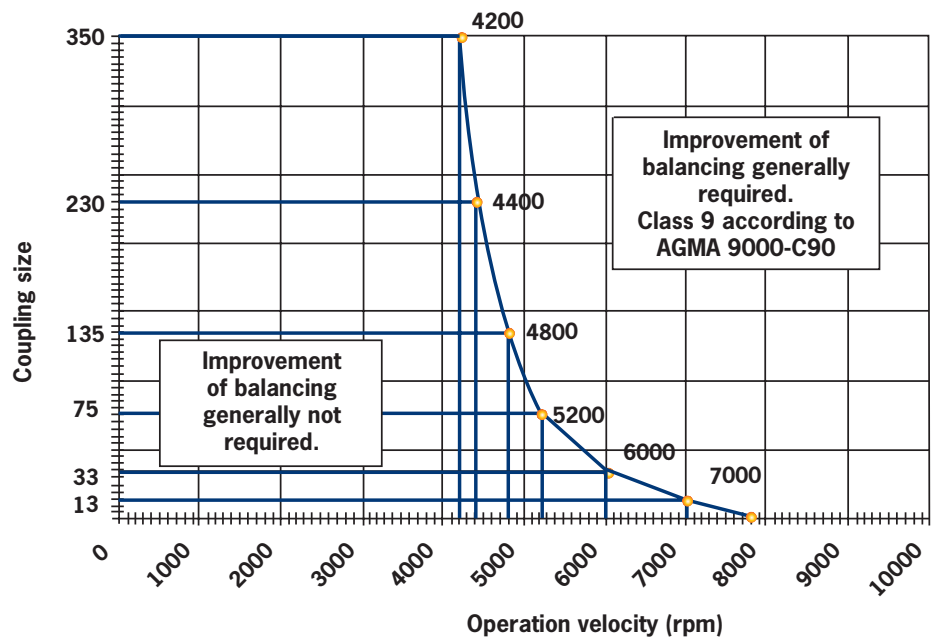

VULKAN DISCFLEX COUPLINGS

ADVANTAGES

- Applicable to high rotations
- Low inertia and high torque

OPTIONAL CHARACTERISTICS:

The Discflex couplings can be supplied in different designs in order to adapt to your application:

- No wearing
- No lubrication
- No back lash

- **With shearing pins**
- **With windage protection rings**
(Turbulência aerodinâmica)

CONSTRUCTIVE METHODS




DS




DII



DJ



DF



D2F




DTB



DEP



DFP



DEPI



- V** Headquarter
- Subsidiaries
- Representatives

Alemanha

VULKAN Kupplungs- und Getriebebau

B.Hackforth GmbH & Co.Kg
Heerstrasse 66
D-44653 Herne
Tel. +49 2325 9220 · Fax +49 2325 71110
E-mail: info@vulkan24.com
Internet: www.vulkan24.com

Austrália

VULKAN Industries
Far East Pte Ltd/Australian Branch
P.O. Box 790, Gosford NSW 2250,
12 Wollong Street
Tel. +61 2 43228533 · Fax +61 2 43228599
E-Mail: enquiries@vulkan.com.au

Bélgica

VULKAN Benelux
Veersedijk 97,
3341 LL Hendrik-Ido-Ambacht Postbus 99,
3340 AB Hendrik-Ido-Ambacht/Netherlands
Tel. +31 78 6810780 · Fax +31 78 6810799
E-Mail: info@vulkan-benelux.com

Brazil

VULKAN do Brasil Ltda.
Rodovia Engenheiro Constancio Cintra
Km 91 - B. da Ponte - Cep 13252-200
Caixa Postal 141 - Itatiba - SP
PABX: (11) 4894-7300 · Fax: (11) 4894-7329
E-mail: vulkan@vulkan-brasil.com.br

China

WUXI VULKAN Technologies Co., Ltd.
Xinzhou Road, Lot 93D-3 in Wuxi Science &
Technology
Industrial Park, 214028 Jiangsu Prov. P. R. China
Tel. +86 510 8534 2222 · Fax +86 510 8534 2345
E-Mail: service@vulkanchina.com

Dinamarca

VULKAN Büro Dänemark
Rugenbarg 277
22549 Hamburg/Germany
Tel. +49 40 840556-0 · Fax +49 40 835892
E-Mail: Helge.Hansen@vulkan24.com

França

VULKAN France SA
12, Avenue Emile Zola, Zac L'Agavon,
13170 Les Pennes Mirabeau/ France
Tel. +33 4 42022100 · Fax +33 4 42022109
E-Mail: krabba@vulkan.fr

Inglatera

VULKAN Industries LTD
Archer Road
Armytage Road Industrial Estate,
Brighouse, W.-Yorkshire, HD6 1XF/GB
Tel. +44 1484 712273 · Fax +44 1484 721376
E-Mail: info@vulkan.co.uk

Noruega

VULKAN Skandinavia AS
Postboks 298
6401 Molde/Norway
Byfogd Motzfeldtsgate 6
6413 Molde/Norway
Tel. +47 71 245990 · Fax +47 71 245995
E-Mail: office@vulkan.no

Portugal

VULKAN Española S.A.
Avda. Montesde Oca, 19, Nave 7
28709 San Sebastian de los Reyes
Tel. +34 91 3590971/72 · Fax +34 91 3453182
E-Mail: vulkan@vulkan.es

Suécia

VULKAN Skandinavia AS
Postboks 298
6401 Molde/Norge
Byfogd Motzfeldtsgate 6
6413 Molde/Norge
Tel. +47 71 245990 · Fax +47 71 245995
E-Mail: office@vulkan.no

Singapura

VULKAN Industries
Far East PTE Ltd.
25, International Business Park
02-61/64 German Centre
Singapore 609916
Tel. +65 6562 9188 · Fax +65 6562 9189
E-Mail: info@vulkan.com.sg

Espanha

VULKAN Española, S.A.
Avda. Montes de Oca, 19, Nave 7
28709 S. S. Reyes, Madrid
Tel. +34 91 3590971/72 · Fax +34 91 3453182
E-Mail: vulkan@vulkan.es

E.U.A.

American VULKAN Corporation
2525 Dundee Road
Winter Haven,
Florida 33884/USA
Tel. +1 863 3242424 · Fax +1 863 3244008
E-Mail: vulkanusa@vulkanusa.com